





- ◆ 分辨率: 0.001mm/0.00005"
- ◆ IP65防护等级
- ◆ 按键: 开/关, 初始值设置, 公/英制转换, 相对/绝对测量转换
- ◆ 数据接口
- ◆ 自动关机
- ◆ 棘轮测力




376-001-04

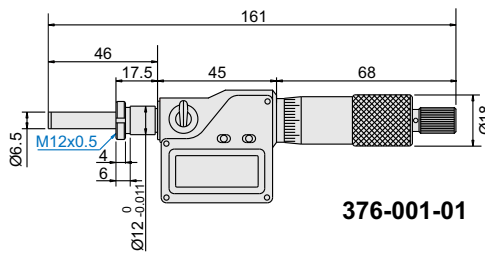


376-001-01

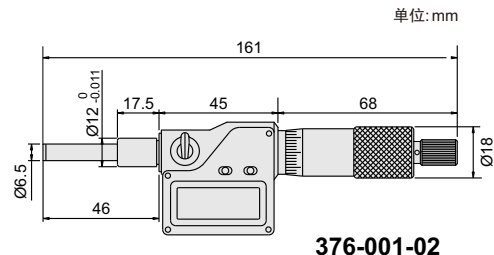


376-001-02

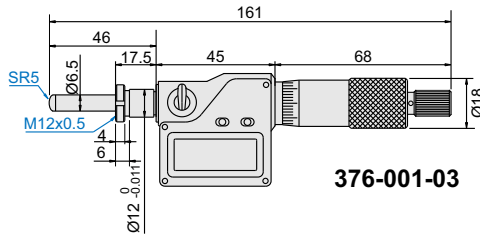

376-001-03

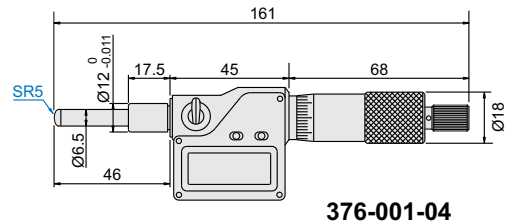

376-001-04

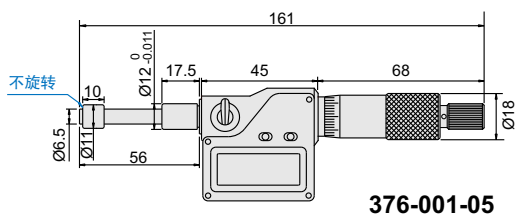

376-001-05

单位: mm

千分尺

旋转式测头

货号	量程	精度	安装螺母	测量面
376-001-01	0-25mm/0-1"	2μm	有	平面(硬质合金)
376-001-02	0-25mm/0-1"	2μm	无	平面(硬质合金)
376-001-03	0-25mm/0-1"	2μm	有	球面(SR5)
376-001-04	0-25mm/0-1"	2μm	无	球面(SR5)

直进式测头

货号	量程	精度	安装螺母	测量面
376-001-05	0-25mm/0-1"	±2μm	无	平面(硬质合金)