




312-001-03


单位: mm

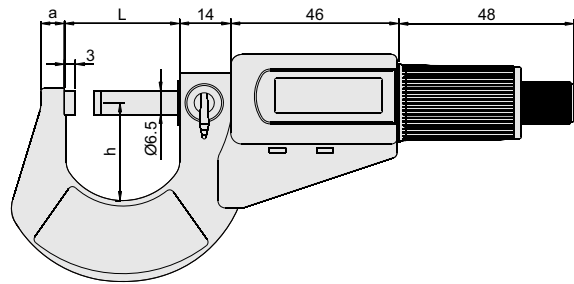

- ◆ 符合JJG外径千分尺国家计量检定规程
- ◆ 分辨率: 0.001mm/0.00005"
- ◆ 按键功能: 开/关机, 公英制转换, 绝对相对测量, 置零
- ◆ 硬质合金量面
- ◆ 棘轮测力
- ◆ 配标准杆(312-001-03除外)

千分尺

标准杆(标配)

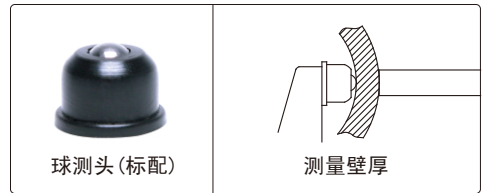

货号	量程	精度	a	h	L	标准杆(标配)
312-001-03*	0-25mm/0-1"	±2μm	6	27.5	32	-
312-002-03*	25-50mm/1-2"	±2μm	8	37	57	25mm
312-003-03*	50-75mm/2-3"	±3μm	8	50	82	50mm
312-004-03*	75-100mm/3-4"	±3μm	10	61	107	75mm
312-005-03	100-125mm/4-5"	±3μm	10	73	132	100mm
312-006-03	125-150mm/5-6"	±3μm	10	85	157	125mm
312-007-03	150-175mm/6-7"	±4μm	21	104	182	150mm
312-008-03	175-200mm/7-8"	±4μm	21	117	207	175mm

套装

货号	量程	数量	包含千分尺量程	包装
312-003-33*	0-75mm/0-3"	3个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3"	吹塑盒
312-004-44*	0-100mm/0-4"	4个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4"	吹塑盒
312-006-66	0-150mm/0-6"	6个	0-25mm/0-1", 25-50mm/1-2", 50-75mm/2-3", 75-100mm/3-4", 100-125mm/4-5", 125-150mm/5-6"	铝盒

\*带生产厂检验证书